

drylin® R linear plain bearings | Product range

Closed, anodised aluminium adapter



Order key

Type

Size

R J U M-01-10

Closed


iglidur® J

Liner

Metric

Standard

Inner Ø d1

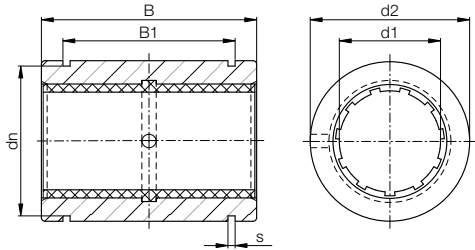

● Secured by circlips



⁷⁸⁾ According to igus® testing method ► Page 1146
⁸¹⁾ Ø < 10mm use press-fitted sleeve plain bearings
⁸²⁾ Design tips ► Page 1078
Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	B1	s	dn	Part No.
	H7	h10	H10	H10	h10	
5	12	22	14.2	1.10	11.5	RJZM-01-05 ⁸¹⁾
6	12	22	14.2	1.10	11.5	RJZM-01-06 ⁸¹⁾
8	16	25	16.2	1.10	15.2	RJZM-01-08 ⁸¹⁾
10	19	29	21.6	1.30	17.5	RJUM-01-10
12	22	32	22.6	1.30	20.5	RJUM-01-12
16	26	36	24.6	1.30	24.2	RJUM-01-16
20	32	45	31.2	1.60	29.6	RJUM-01-20
25	40	58	43.7	1.85	36.5	RJUM-01-25
30	47	68	51.7	1.85	43.5	RJUM-01-30
40	62	80	60.3	2.15	57.8	RJUM-01-40
50	75	100	77.3	2.65	70.5	RJUM-01-50
60	90	125	101.7	3.15	86.5	RJUM-01-60

Technical data

Part No.	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾	Fmax. static ⁸²⁾	Weight
		p = 5MPa	p = 35MPa	
	[mm]	[N]	[N]	[g]
RJZM-01-05 ⁸¹⁾	+0.025 +0.060	525	3,675	5
RJZM-01-06 ⁸¹⁾	+0.025 +0.060	525	3,675	5
RJZM-01-08 ⁸¹⁾	+0.032 +0.070	960	6,720	9
RJUM-01-10	+0.030 +0.088	725	5,075	14
RJUM-01-12	+0.030 +0.088	960	6,720	21
RJUM-01-16	+0.030 +0.088	1,440	10,080	28
RJUM-01-20	+0.030 +0.091	2,250	15,750	49
RJUM-01-25	+0.030 +0.091	3,625	25,375	108
RJUM-01-30	+0.040 +0.110	5,100	35,700	162
RJUM-01-40	+0.040 +0.115	8,000	56,000	334
RJUM-01-50	+0.050 +0.130	9,000	87,500	579
RJUM-01-60	+0.050 +0.140	12,000	120,000	1,070

drylin® R linear plain bearings | Product range

Closed, anodised aluminium adapter, precise



Order key

Type

Size

R J U M-11-10

Closed


iglidur® J

Liner

Metric

Precise

Inner Ø d1

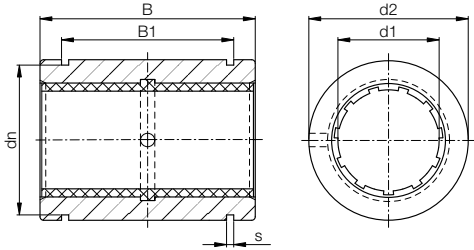

● Max. bearing clearance reduced by 50%
● Secured by circlips



⁷⁸⁾ According to igus® testing method ► Page 1146
⁸²⁾ Design tips ► Page 1078
Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	B1	s	dn	Part No.
	H7	h10	H10	H10	h10	
10	19	29	21.6	1.30	17.5	RJUM-11-10
12	22	32	22.6	1.30	20.5	RJUM-11-12
16	26	36	24.6	1.30	24.2	RJUM-11-16
20	32	45	31.2	1.60	29.6	RJUM-11-20
25	40	58	43.7	1.85	36.5	RJUM-11-25
30	47	68	51.7	1.85	43.5	RJUM-11-30
40	62	80	60.3	2.15	57.8	RJUM-11-40
50	75	100	77.3	2.65	70.5	RJUM-11-50

Technical data

Part No.	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾	Fmax. static ⁸²⁾	Weight
		p = 5MPa	p = 35MPa	
	[mm]	[N]	[N]	[g]
RJUM-11-10	+0.000 +0.058	725	5,075	14
RJUM-11-12	+0.000 +0.058	960	6,720	21
RJUM-11-16	+0.000 +0.058	1,440	10,080	28
RJUM-11-20	+0.000 +0.061	2,250	15,750	49
RJUM-11-25	+0.000 +0.061	3,625	25,375	108
RJUM-11-30	+0.000 +0.075	5,100	35,700	162
RJUM-11-40	+0.000 +0.080	8,000	56,000	334
RJUM-11-50	+0.000 +0.090	12,500	87,500	579

Can be combined with:



RQA-01



RTA-01



RGA-01



RGAS-01



J



E7



X

Available with drylin® liners (optional: J200/A180):


drylin® R linear plain bearings | Product range

Closed stainless steel adapter made of stainless steel 303



Order key

Type	Size	Material
R J U M-01-12-ES		
Closed	iglidur® J	Liner
		Metric
		Standard
	Inner Ø d1	
		Stainless steel

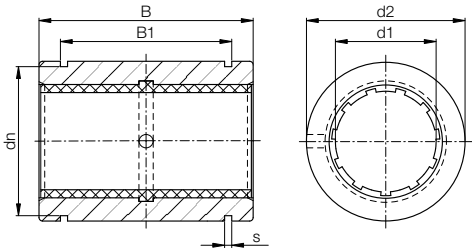

● Secured by circlips



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	B1	s	dn	Part No.
	H7	h10	H10	H10	h10	
12	22	32	22.6	1.30	20.5	RJUM-01-12-ES
16	26	36	24.6	1.30	24.2	RJUM-01-16-ES
20	32	45	31.2	1.60	29.6	RJUM-01-20-ES
25	40	58	43.7	1.85	36.5	RJUM-01-25-ES
30	47	68	51.7	1.85	43.5	RJUM-01-30-ES

Technical data

Part No.	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾	Fmax. static ⁸²⁾	Weight
	[mm]	p = 5MPa [N]	p = 35MPa [N]	[g]
RJUM-01-12-ES	+0.030 +0.088	960	6,720	60
RJUM-01-16-ES	+0.030 +0.088	1,440	10,080	84
RJUM-01-20-ES	+0.030 +0.091	2,250	15,750	147
RJUM-01-25-ES	+0.030 +0.091	3,625	25,375	324
RJUM-01-30-ES	+0.040 +0.110	5,100	35,700	486

Available with drylin® liners (optional: J200/A180):



J



E7



X



drylin® R linear plain bearings | Product range

Closed, anodised aluminium adapter, short design



Order key

Type	Size
R J U M-02-10	
Closed	iglidur® J
	Liner
	Metric
	Compact
	Inner Ø d1



● Also available as a reduced clearance version
RJUM-12 (Ø 10–50mm)



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸¹⁾ Ø < 10mm use press-fitted sleeve bearings

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	Part No.
	H7	h10	
6	12	22	RJZM-02-06 ⁸¹⁾
8	15	24	RJZM-02-08 ⁸¹⁾
10	17	26	RJUM-02-10
12	19	28	RJUM-02-12
16	24	30	RJUM-02-16
20	28	30	RJUM-02-20
25	35	40	RJUM-02-25
30	40	50	RJUM-02-30
40	52	60	RJUM-02-40
50	62	70	RJUM-02-50

Technical data

Part No.	Housing hole	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾	Fmax. static ⁸²⁾	Weight
	Ø H7 [mm]	[mm]	p = 5MPa [N]	p = 35MPa [N]	[g]
RJZM-02-06 ⁸¹⁾	12	+0.032 +0.070	600	4,200	4
RJZM-02-08 ⁸¹⁾	15	+0.032 +0.070	650	4,550	6
RJUM-02-10	17	+0.030 +0.088	650	4,550	8
RJUM-02-12	19	+0.030 +0.088	840	5,880	10
RJUM-02-16	24	+0.030 +0.088	1,200	8,400	17
RJUM-02-20	28	+0.030 +0.091	1,500	10,500	18
RJUM-02-25	35	+0.030 +0.091	2,500	17,500	42
RJUM-02-30	40	+0.040 +0.110	3,750	26,250	56
RJUM-02-40	52	+0.040 +0.115	6,000	42,000	113
RJUM-02-50	62	+0.050 +0.130	8,750	61,250	147

drylin® R linear plain bearings | Product range

Closed, anodised aluminium adapters
with iglidur® E7 liner




Order key

TypeSize

R E7 U M-01-10

Closedigidur® E7LinerMetricStandardInner Ø d1

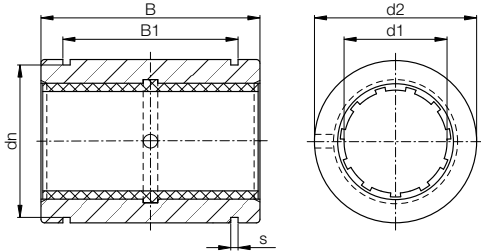

● Secured by circlips



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	B1	s	dn	Part No.
	H7	h10	H10	H10	h10	
10	19	29	21.6	1.30	17.5	RE7UM-01-10
12	22	32	22.6	1.30	20.5	RE7UM-01-12
16	26	36	24.6	1.30	24.2	RE7UM-01-16
20	32	45	31.2	1.60	29.6	RE7UM-01-20
25	40	58	43.7	1.85	36.5	RE7UM-01-25
30	47	68	51.7	1.85	43.5	RE7UM-01-30
40	62	80	60.3	2.15	57.8	RE7UM-01-40
50	75	100	77.3	2.65	70.5	RE7UM-01-50
60	90	125	101.7	3.15	86.5	RE7UM-01-60

Technical data

Part No.	d1 tolerance ⁷⁸⁾	F max. dynamic ⁸²⁾	F max. static ⁸²⁾	Weight
		p = 2.5MPa	p = 18MPa	
	[mm]	[N]	[N]	
RE7UM-01-10	+0.030 +0.088	360	2,610	14
RE7UM-01-12	+0.030 +0.088	480	3,450	21
RE7UM-01-16	+0.030 +0.088	720	5,180	28
RE7UM-01-20	+0.030 +0.091	1,120	8,100	49
RE7UM-01-25	+0.030 +0.091	1,810	13,050	108
RE7UM-01-30	+0.040 +0.110	2,550	18,360	162
RE7UM-01-40	+0.040 +0.115	4,000	28,800	334
RE7UM-01-50	+0.050 +0.180	4,500	45,000	579
RE7UM-01-60	+0.050 +0.190	6,000	61,700	1,070

drylin® R linear plain bearings | Product range

Closed, anodised aluminium adapters, short design
with iglidur® E7 liner




Order key

TypeSize

R E7 U M-02-10

Closedigidur® E7LinerMetricCompactInner Ø d1

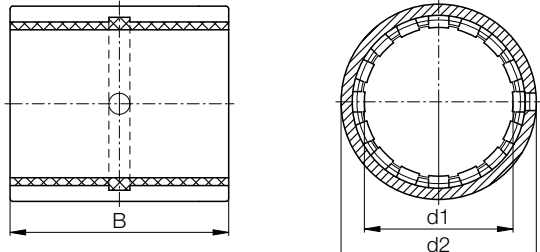

⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Dimensions [mm]

d1	d2	B	Part No.
	H7	h10	
10	17	26	RE7UM-02-10
12	19	28	RE7UM-02-12
16	24	30	RE7UM-02-16
20	28	30	RE7UM-02-20
25	35	40	RE7UM-02-25
30	40	50	RE7UM-02-30
40	52	60	RE7UM-02-40
50	62	70	RE7UM-02-50

Technical data

Part No.	Housing hole	d1 tolerance ⁷⁸⁾	F max. dynamic ⁸²⁾	F max. static ⁸²⁾	Weight
			p = 2.5MPa	p = 18MPa	
	Ø H7 [mm]	[mm]	[N]	[N]	
RE7UM-02-10	17	+0.030 +0.088	325	2,340	8
RE7UM-02-12	19	+0.030 +0.088	420	3,020	10
RE7UM-02-16	24	+0.030 +0.088	600	4,320	17
RE7UM-02-20	28	+0.030 +0.091	750	5,400	18
RE7UM-02-25	35	+0.030 +0.091	1,250	9,000	42
RE7UM-02-30	40	+0.040 +0.110	1,875	13,500	56
RE7UM-02-40	52	+0.040 +0.115	3,000	21,600	113
RE7UM-02-50	62	+0.050 +0.180	4,375	31,500	147


drylin® R linear plain bearings | Product range

Closed aluminium adapter (floating bearing)



Order key

Type	Size
R J U M-03-10	
Closed	iglidur® J
Liner	Metric
Self-aligning	Inner Ø d1

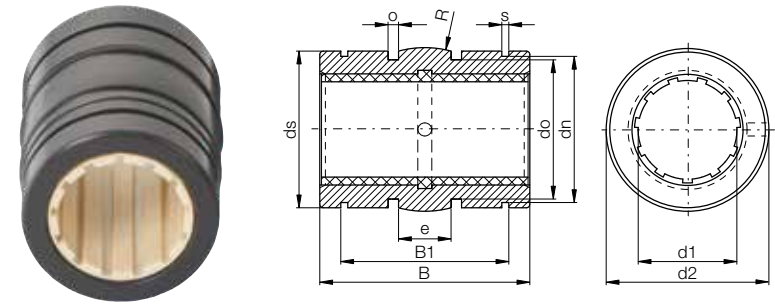

- With reduced outer diameter, spherical area on the outer diameter, O-rings for elastic seating and hard-anodised surface



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸¹⁾ Ø < 10mm use press-fitted sleeve plain bearings

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Floating bearing ► Page 1078

Imperial dimensions ► Page 1615




Dimensions [mm]

d1	d2 H7	B h10	B1 H10	s H10	dn h10	ds h10	do	o +0.1	e	R	Part No.
8	15.8	24.9	16.4	1.10	15.0	15.5	13.2	1.86	5.0	20.0	RJZM-03-08 ⁸¹⁾
10	18.8	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	13.0	RJUM-03-10
12	21.8	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	18.0	RJUM-03-12
16	25.8	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	32.0	RJUM-03-16
20	31.8	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	50.0	RJUM-03-20
25	39.8	57.8	44.1	1.85	36.5	39.0	34.4	2.86	12.5	39.0	RJUM-03-25
30	46.7	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	57.0	RJUM-03-30
40	61.7	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	100.0	RJUM-03-40
50	74.7	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	157.0	RJUM-03-50

Technical data

Part No.	Housing hole	d1 tolerance ⁷⁸⁾ [mm]	F max. dynamic ⁸²⁾ p = 5MPa [N]	Fmax. static ⁸²⁾ p = 35MPa [N]	Weight [g]
	Ø H7 [mm]				
RJZM-03-08 ⁸¹⁾	16	+0.032 +0.070	960	6,720	8
RJUM-03-10	19	+0.030 +0.088	725	5,075	11
RJUM-03-12	22	+0.030 +0.088	960	6,720	17
RJUM-03-16	26	+0.030 +0.088	1,440	10,080	23
RJUM-03-20	32	+0.030 +0.091	2,250	15,750	44
RJUM-03-25	40	+0.030 +0.091	3,625	25,375	92
RJUM-03-30	47	+0.040 +0.110	5,100	35,700	145
RJUM-03-40	62	+0.040 +0.115	8,000	56,000	311
RJUM-03-50	75	+0.050 +0.150	12,500	87,500	542

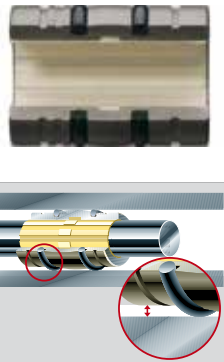

Can be combined with:



Available with drylin® liners (optional: J200/A180):




drylin® R linear plain bearings | Product range

Split anodised aluminium adapter



Order key

Type	Size
T J U M-01-10	
Open	iglidur® J
Liner	Metric
Standard	Inner Ø d1

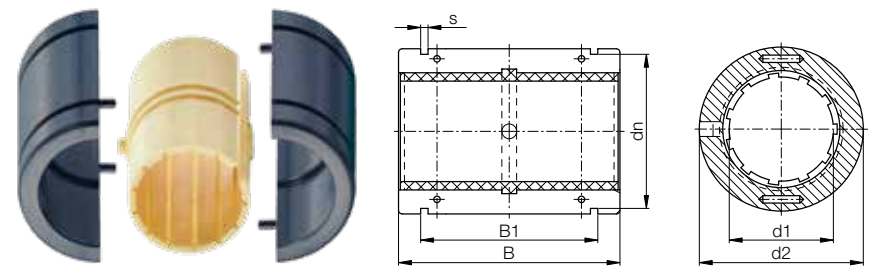

- Quick replacement of the liner without removing the shaft



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Imperial dimensions ► Page 1616



Dimensions [mm]

d1	d2 H7	B h10	B1 H10	s H10	dn h10	Part No.
10	19 -0.020 -0.040	29	21.6	1.30	17.5	TJUM-01-10
12	22 -0.020 -0.040	32	22.6	1.30	20.5	TJUM-01-12
16	26 -0.020 -0.040	36	24.6	1.30	24.2	TJUM-01-16
20	32 -0.020 -0.045	45	31.2	1.60	29.6	TJUM-01-20
25	40 -0.030 -0.055	58	43.7	1.85	36.5	TJUM-01-25
30	47 -0.030 -0.055	68	51.7	1.85	43.5	TJUM-01-30
40	62 -0.030 -0.060	80	60.3	2.15	57.8	TJUM-01-40
50	75 -0.030 -0.060	100	77.3	2.65	70.5	TJUM-01-50

Technical data

Part No.	d1 tolerance ⁷⁸⁾ [mm]	Fmax. dynamic ⁸²⁾ p = 5MPa [N]	Fmax. static ⁸²⁾ p = 35MPa [N]	Weight [g]
TJUM-01-10	+0.030 +0.092	725	5,075	14
TJUM-01-12	+0.030 +0.097	960	6,720	19
TJUM-01-16	+0.030 +0.097	1,440	10,080	27
TJUM-01-20	+0.030 +0.103	2,250	15,750	49
TJUM-01-25	+0.030 +0.103	3,625	25,375	106
TJUM-01-30	+0.040 +0.124	5,100	35,700	166
TJUM-01-40	+0.040 +0.124	8,000	56,000	347
TJUM-01-50	+0.050 +0.196	12,500	87,500	577

Can be combined with:



Available with drylin® liners (optional: J200/A180):



drylin® R linear plain bearings | Product range

Split aluminium adapter (floating bearing)




Order key

Type	Size
------	------

T J U M-03-10

Open	iglidur® J	Liner	Metric	Self-aligning	Inner Ø d1
------	------------	-------	--------	---------------	------------

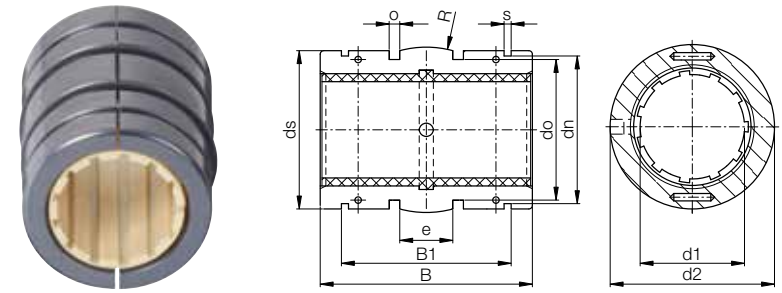

- Split aluminium adapter with spherical middle area for automatic compensation of misalignments and O-rings for elastic seating



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079

Floating bearing ► Page 1078




Imperial dimensions ► Page 1616

Dimensions [mm]

d1	d2	B	B1	s	dn	ds	do	o	e	R	Part No.
	H7	h10	H10	H10	h10	h10		+0.1			
10	19	-0.020 -0.040	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	TJUM-03-10
12	22	-0.020 -0.040	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	TJUM-03-12
16	26	-0.020 -0.040	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	TJUM-03-16
20	32	-0.020 -0.045	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	TJUM-03-20
25	40	-0.030 -0.055	57.8	44.1	1.85	36.5	39.0	34.4	2.86	12.5	TJUM-03-25
30	47	-0.030 -0.055	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	TJUM-03-30
40	62	-0.030 -0.060	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	TJUM-03-40
50	75	-0.030 -0.060	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	TJUM-03-50

Technical data

Part No.	d1 tolerance ⁷⁸⁾ [mm]	Fmax. dynamic ⁸²⁾ p = 5 MPa [N]		Fmax. static ⁸²⁾ p = 35 MPa [N]		Weight [g]
TJUM-03-10	+0.030 +0.092	725		5,075		11
TJUM-03-12	+0.030 +0.097	960		6,720		17
TJUM-03-16	+0.030 +0.097	1,440		10,080		23
TJUM-03-20	+0.030 +0.103	2,250		15,750		44
TJUM-03-25	+0.030 +0.103	3,625		25,375		92
TJUM-03-30	+0.040 +0.124	5,100		35,700		145
TJUM-03-40	+0.040 +0.124	8,000		56,000		311
TJUM-03-50	+0.050 +0.196	12,500		87,500		542



Can be combined with:



Available with drylin® liners (optional: J200/A180):



drylin® R linear plain bearings | Product range

Open, anodised aluminium adapters – for supported shafts





Order key

Type	Size
------	------

O J U M-01-10

Open	iglidur® J	Liner	Metric	Standard	Inner Ø d1
------	------------	-------	--------	----------	------------

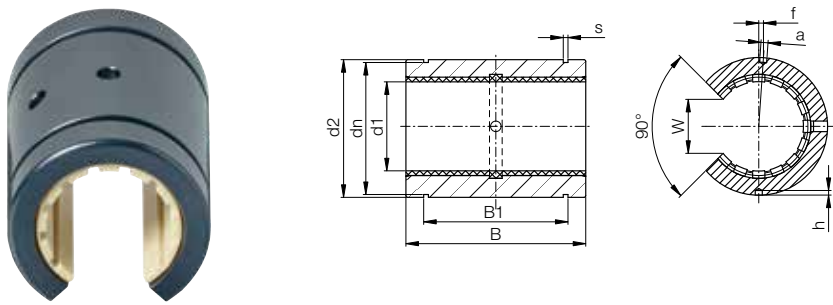

⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078

Please note: Installation instructions ► Page 1079



Imperial dimensions ► Page 1614

Dimensions [mm]

d1	d2	B	W	a	dn	B1	s	f	h	Part No.
	H7	h10	-1	+0.1	h10	H10	H10	±0.2	-0.5	
10	19	29	7.3	0.0	17.5	21.6	1.30	0	1.2	OJUM-01-10
12	22	32	9.0	3.0	20.5	22.6	1.30	1.33 (7°)	1.2	OJUM-01-12
16	26	36	11.6	2.2	24.2	24.6	1.30	0	1.2	OJUM-01-16
20	32	45	12.0	2.2	29.6	31.2	1.60	0	1.2	OJUM-01-20
25	40	58	14.5	3.0	36.5	43.7	1.85	-1.5 (-4.3°)	1.5	OJUM-01-25
30	47	68	16.6	3.0	43.5	51.7	1.85	2 (4.9°)	2.0	OJUM-01-30
40	62	80	21.0	3.0	57.8	60.3	2.15	1.5 (2.8°)	2.0	OJUM-01-40
50	75	100	25.5	5.0	70.5	77.3	2.65	2.5 (3.8°)	2.0	OJUM-01-50

Technical data

Part No.	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾ p = 5 MPa			Fmax. static ⁸²⁾ p = 35 MPa			Weight [g]
		0°	90°	180°	0°	90°	180°	
OJUM-01-10	+0.030 +0.088	725	500	196	5,075	3,500	1,370	11
OJUM-01-12	+0.030 +0.088	960	635	240	6,720	4,445	1,680	15
OJUM-01-16	+0.030 +0.088	1,440	990	396	10,080	6,943	2,772	21
OJUM-01-20	+0.030 +0.091	2,250	1,800	900	15,750	12,600	6,300	42
OJUM-01-25	+0.030 +0.091	3,625	2,953	1,523	25,375	20,670	10,658	70
OJUM-01-30	+0.040 +0.110	5,100	4,250	2,278	35,700	29,735	15,946	132
OJUM-01-40	+0.040 +0.115	8,000	6,810	3,800	56,000	47,660	26,660	278
OJUM-01-50	+0.050 +0.150	12,500	10,750	6,125	87,500	75,265	42,875	479

Can be combined with:




Available with drylin® liners (optional: J200/A180):



drylin® R linear plain bearings | Product range

Open, anodised aluminium adapter, floating bearing

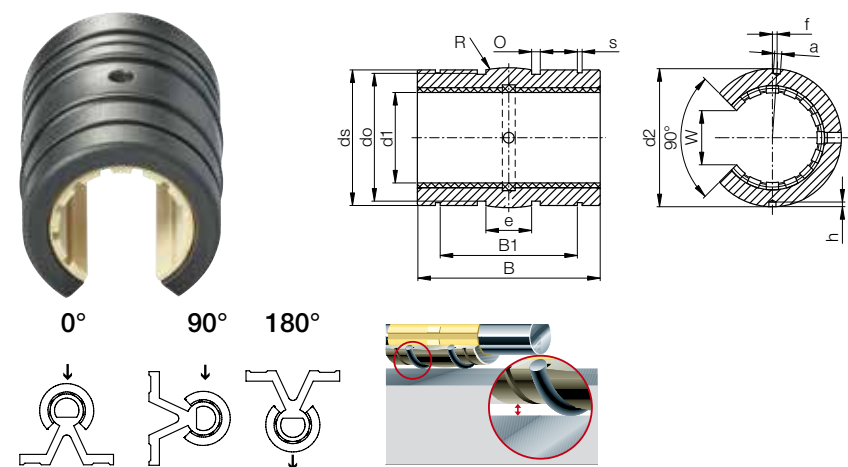

Order key

Type

Size

O J U M-03-10



● With reduced outer diameter, spherical area on the outer diameter, O-rings for elastic seating and hard-anodised surface



⁷⁸⁾ According to igus® testing method ► Page 1146

⁸²⁾ Design tips ► Page 1078



Please note: Installation instructions ► Page 1079

Imperial dimensions ► Page 1614

Dimensions [mm]

d1	d2	ds	e	o	do	B1	s	B	R	W	a	f	h	Part No.
	H7	h10		+0.1		H10	H10	h10		-1	+0.1	±0.2	-0.5	
10	18.8	18.5	5.0	1.86	15.4	21.8	1.30	28.9	13.0	7.3	0.0	0	1.2	OJUM-03-10
12	21.8	21.5	6.0	1.86	18.4	22.8	1.30	31.9	18.0	9.0	3.0	1.33 (7°)	1.2	OJUM-03-12
16	25.8	25.5	8.0	2.86	20.4	24.9	1.30	35.9	32.0	11.6	2.2	0	1.2	OJUM-03-16
20	31.8	31.5	10.0	2.86	26.4	31.5	1.60	44.8	50.0	12.0	2.2	0	1.2	OJUM-03-20
25	39.8	39.0	12.5	2.86	34.4	44.1	1.85	57.8	39.0	14.5	3.0	-1.5 (-4.3°)	1.5	OJUM-03-25
30	46.7	46.0	15.0	2.86	41.4	52.1	1.85	67.8	57.0	16.6	3.0	2 (4.9°)	2	OJUM-03-30
40	61.7	61.0	20.0	2.86	56.4	60.9	2.15	79.8	100.0	21.0	3.0	1.5 (2.8°)	2	OJUM-03-40
50	74.7	74.0	25.0	2.86	69.4	78.0	2.65	99.8	157.0	25.5	5.0	2.5 (3.8°)	2	OJUM-03-50

Technical data

Part No.	Housing hole Ø H7 [mm]	d1 tolerance ⁷⁸⁾	Fmax. dynamic ⁸²⁾ p = 5MPa			Fmax. static ⁸²⁾ p = 35MPa			Weight [g]
			0°	90°	180°	0°	90°	180°	
OJUM-03-10	19	+0.030 +0.088	725	500	196	5,075	3,500	1,370	10
OJUM-03-12	22	+0.030 +0.088	960	635	240	6,720	4,445	1,680	13
OJUM-03-16	26	+0.030 +0.088	1,440	990	396	10,080	6,943	2,772	19
OJUM-03-20	32	+0.030 +0.091	2,250	1,800	900	15,750	12,600	6,300	38
OJUM-03-25	40	+0.030 +0.091	3,625	2,953	1,523	25,375	20,670	10,658	63
OJUM-03-30	47	+0.040 +0.110	5,100	4,250	2,278	35,700	29,735	15,946	119
OJUM-03-40	62	+0.040 +0.115	8,000	6,810	3,800	56,000	47,660	26,600	250
OJUM-03-50	75	+0.050 +0.150	12,500	10,750	6,125	87,500	75,265	42,875	431

Can be combined with:



RQA-03



RTA-03



RGA-03



RGAS-03



J



E7



X

Available with drylin® liners (optional: J200/A180):

My sketches

