

## The versatile endurance runner – iglidur® J

Plastic plates made from iglidur® can be supplied cut to size, with thickness ranging from 2mm to 40mm and available in up to 7 standard sizes.

### Order key for plates

Type: **SFPJ** Dimensions [mm]: **-□-500-240**

Bar stock | **Plate** | iglidur® material

Material thickness | Length | Width



Dimensions (L x B)	Material thickness s	Part No.
500x240	2 / 3 / 4 / 5 / 6	SFPJ-□-500-240
500x300	10 / 15 / 20 / 25 / 30 / 40	SFPJ-□-500-300
500x500	2 / 3 / 4 / 5 / 6	SFPJ-□-500-500
500x610	10 / 15 / 20 / 25 / 30 / 40	SFPJ-□-500-610
1,000x500	2 / 3 / 4 / 5 / 6	SFPJ-□-1000-500
1,000x610	10 / 15 / 20 / 25 / 30 / 40	SFPJ-□-1000-610
1,000x1,000	2 / 3 / 4 / 5 / 6	SFPJ-□-1000-1000

Tolerances	
Material thickness	Tolerance
2	+0.000 +0.200
3	+0.000 +0.200
4	+0.000 +0.250
5	+0.000 +0.250
6	+0.000 +0.300
10	+0.200 +0.900
15	+0.300 +1.500
20	+0.300 +1.500
25	+0.300 +1.500
30	+0.500 +2.500
40	+0.500 +2.500


## Extremely wear-resistant in black – iglidur® JB



Dimensions (L x B)	Material thickness s	Part No.
500x300	10 / 25	SFPJB-□-500-300
500x610	10 / 25	SFPJB-□-500-610
1,000x610	10 / 25	SFPJB-□-1000-610

Tolerances	
Material thickness	Tolerance
10	+0.200 +0.900
25	+0.300 +1.500

## The FDA-compliant endurance runner at higher temperatures – iglidur® A350

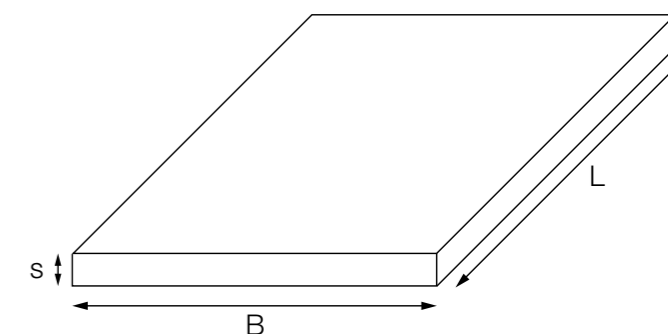

Dimensions (L x B)	Material thickness s	Part No.
500x300	15 / 20 / 25 / 30	SFPA350-□-500-300
500x610	15 / 20 / 25 / 30	SFPA350-□-500-610
1,000x610	15 / 20 / 25 / 30	SFPA350-□-1000-610

Tolerances	
Material thickness	Tolerance
15	+0.300 +1.500
20	+0.300 +1.500
25	+0.300 +1.500
30	+0.500 +2.500

## FDA and EU 10/2011-compliant – iglidur® A160



Dimensions (L x B)	Material thickness s	Part No.
500x300	10 / 20	SFPA160-□-500-300
500x610	10 / 20	SFPA160-□-500-610
1,000x610	10 / 20	SFPA160-□-1000-610

Tolerances	
Material thickness	Tolerance
10	+0.200 +0.900
20	+0.300 +1.500

## FDA-compliant – iglidur® A180



Dimensions (L x B)	Material thickness s	Part No.
500x300	10 / 20	SFPA180-□-500-300
500x610	10 / 20	SFPA180-□-500-610
1,000x610	10 / 20	SFPA180-□-1000-610

Tolerances	
Material thickness	Tolerance
10	+0.200 +0.900
20	+0.300 +1.500