


Pneumatic-Spring

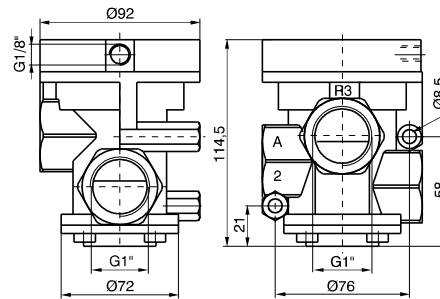

Weight 1060 gr.

Ordering code

771/V.32.11.F

FUNCTION

F 1C=Normally Closed
1A=Normally Open

For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3


For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +70
Orifice size (mm)	25
Working port size	G1"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	1C = 45 - 1A = 18
Response time according to ISO 12238 de-energised (ms)	1C = 250 - 1A = 260

Solenoid-Spring-Self feeding

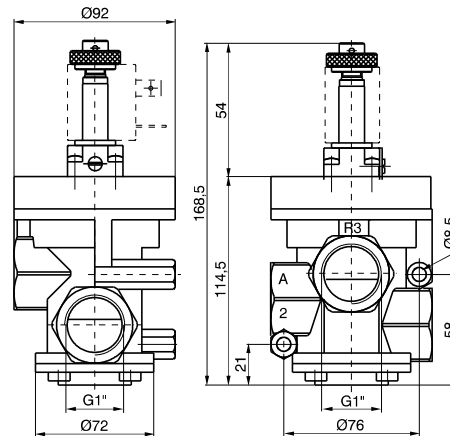

Weight 1120 gr.

Ordering code

771/V.32.0.F.M2/V

FUNCTION

F 1AA=Normally Open
1AC=Normally Closed

For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3


For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1

Operational characteristics

Fluid	Vacuum
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G1"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	1AC = 120 - 1AA = 35
Response time according to ISO 12238 de-energised (ms)	1AC = 20 - 1AA = 40

Solenoid-Spring-External feeding

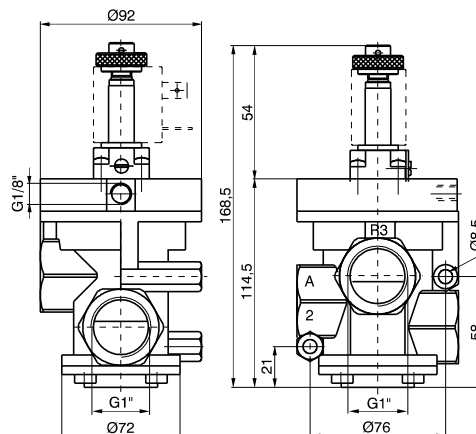

Weight 1120 gr.

Ordering code

771/V.32.0.G.M2

FUNCTION

F 1A=Normally Open
1C=Normally Closed

For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3

For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G1"