




Pneumatic-Spring

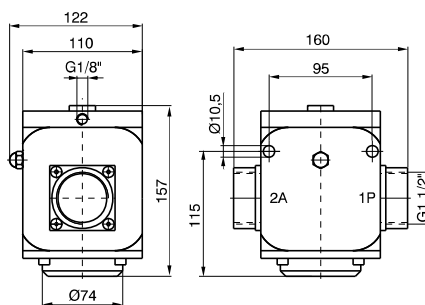


Ordering code

776/V.22.11.1C

For vacuum - N.C.

Outlet: Port 2
Pump: Port 1




Weight 3950 gr.
Normally Closed

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +70
Orifice size (mm)	38
Working port size	G1 1/2"
Pilot port size	G1/8"

Solenoid-Spring

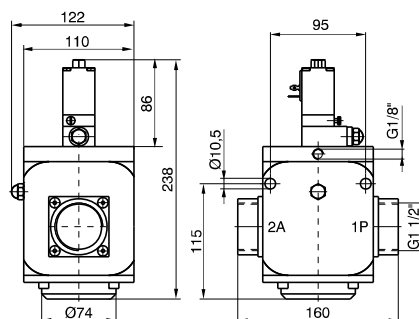

Ordering code


776/V.22.0.1C.S

SOLENOID CODE

See S.V. pag.109

For vacuum - N.C.

Outlet: Port 2
Pump: Port 1




Weight 4450 gr.
External feeding Normally closed

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +50
Orifice size (mm)	38
Working port size	G1 1/2"
Pilot port size	G1/8"

Pneumatic-Spring

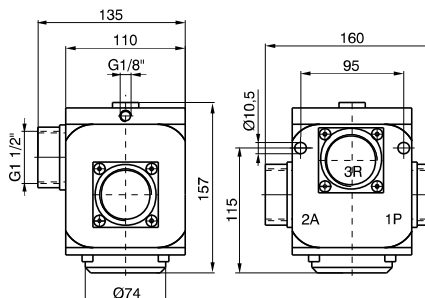

Ordering code

776/V.32.11.F


FUNCTION

1A=Normally Open

1C=Normally Closed


For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3



For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1



Weight 3900 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +70
Orifice size (mm)	38
Working port size	G1 1/2"