
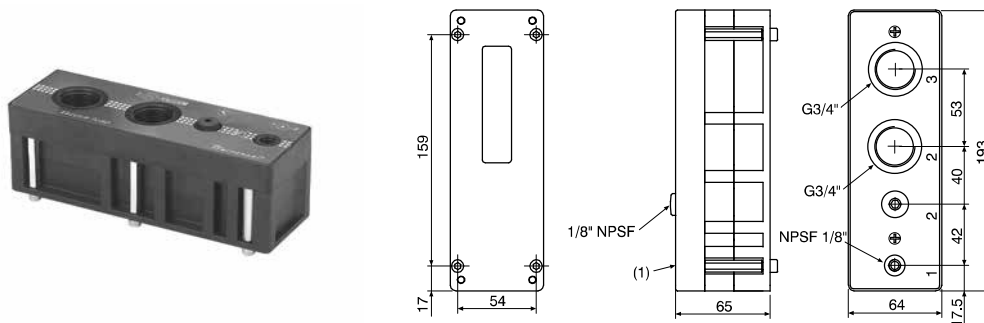




Multistage high flow vacuum generator G3/4"

Ordering code

19T34.M.46.HF.QQ
Operational characteristics

- Optimum inlet pressure (bar)	3.4
- Inlet pressure (bar)	3.4 / 6
- Degree of Vacuum (-kPa)	89 / 92
- Intake flow rate (l/min)	760 / 950
- Air consumption (l/min)	365 / 610

Performance Charts

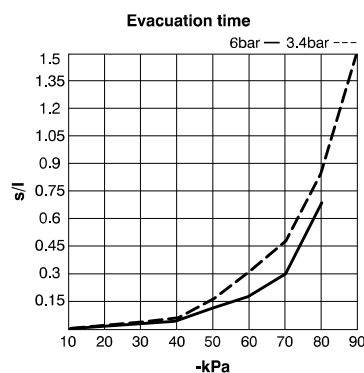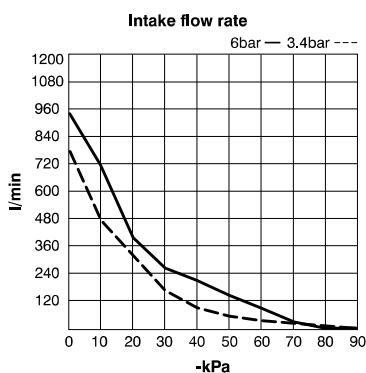

Inlet pressure (bar)	Air consumption (l/min)	Evacuation time (s/l) at different levels of vacuum (-kPa)										Degree of Vacuum max. (-kPa)
		0	10	20	30	40	50	60	70	80	90	
3.4	365	760	445	340	175	110	85	70	43	20	1.8	92
6	610	950	710	380	285	230	170	100	32	11	/	89

Inlet pressure (bar)	Air consumption (l/min)	Evacuation time (s/l) at different levels of vacuum (-kPa)									Degree of Vacuum max. (-kPa)
		10	20	30	40	50	60	70	80	90	
3.4	365	0.012	0.029	0.058	0.095	0.18	0.31	0.46	0.89	1.5	92
6	610	0.009	0.019	0.045	0.075	0.13	0.18	0.31	0.70	/	89

Technical characteristics

Fluid	Unlubricated filtered air
Max. inlet pressure (bar)	3,4 ... 6
Noise (dBA)	93
Temperature (°C)	-20 ... +80
Material	PPS, SS, PA, NBR
Weight (gr)	837

Accessories

19S34.R	Reduced silencer G3/4"
19S34.S	Silencer G3/4"