

- Pneumatic by-pass
- Available with 2 threaded connections



Technical characteristics	Size				
	Size 1	Size 2	Size 3		
Body and connections type	Aluminium body				
IN / OUT Connections	G1/4"	G3/8"	G1/2"		
INTAKE connections	G1/8"	G1/4"	G3/8"		
Assembly configuration	Stand alone	Stand alone	Stand alone		
Assembly position	Indifferent				
Max. fittings torque IN / OUT connections	G1/4" metal: 20	G3/8" metal: 25	G1/2" metal: 30		

Operational characteristics	Size				
	Size 1	Size 2	Size 3		
Maximum working pressure (bar)		13			
Working temperature (°C)		-5 ÷ +50			

Weights	Size		
	Size 1	Size 2	Size 3
Aluminium body version (g)	50	116	192

## Order codes


17 3 40H Size, body and connections


- 1 : Aluminium body, connections G1/4" (only for size 1)
- 2: Aluminium body, connections G3/8" (only for size 2)
- 3 : Aluminium body, connections G1/2" (only for size 3)

## Example: 17340H

Air Intake - "H" profile Size 3, Aluminium body, G1/2" connections

## **Dimensions**

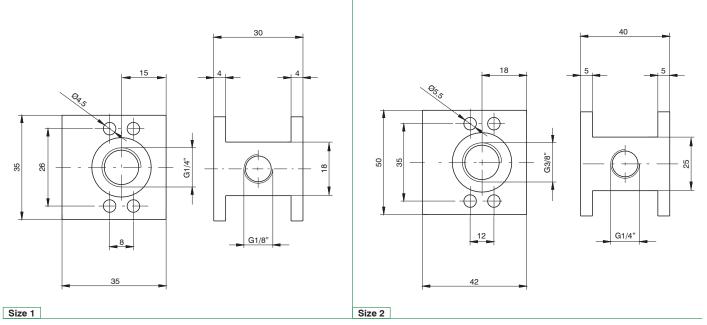

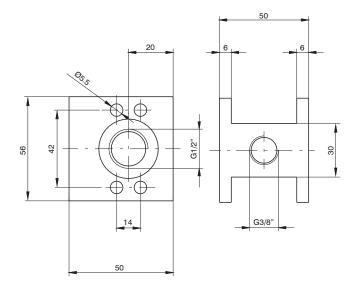

Size 3