
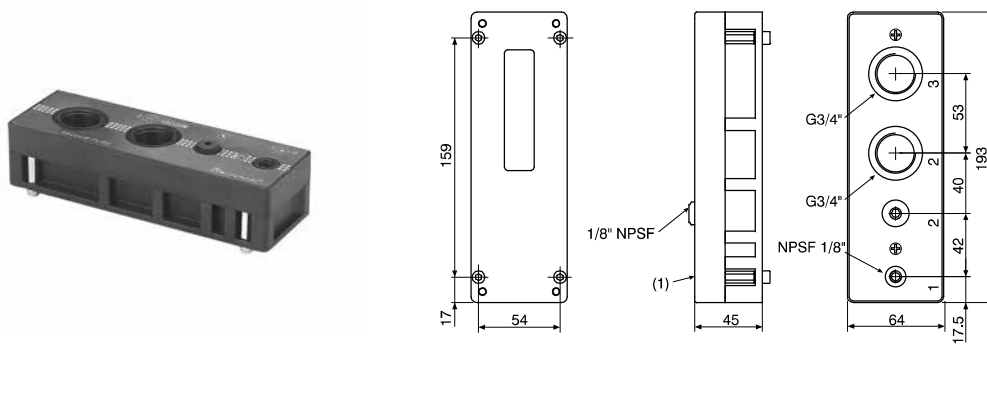


Multistage high flow vacuum generator G3/4"



Ordering code

19T34.M.32.HF.QQ

Operational characteristics

- Optimum inlet pressure (bar)	3.4
- Inlet pressure (bar)	3.4 / 6
- Degree of Vacuum (-kPa)	89 / 92
- Intake flow rate (l/min)	360 / 420
- Air consumption (l/min)	116 / 185

Performance Charts

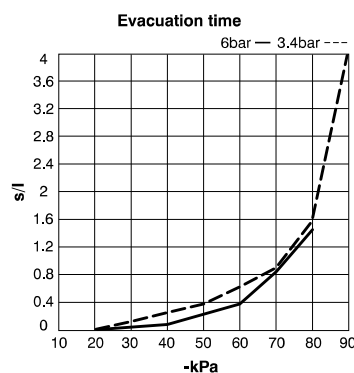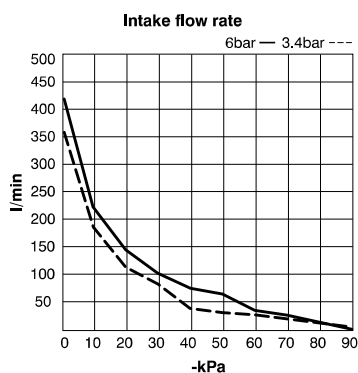

Inlet pressure (bar)	Air consumption (l/min)	Evacuation time (s/l) at different levels of vacuum (-kPa)										Degree of Vacuum max. (-kPa)
		0	10	20	30	40	50	60	70	80	90	
3.4	116	360	180	115	80	43	30	22.5	15.5	7.5	1.2	92
6	185	420	240	125	100	82	65	38	12.5	3.5	/	89

Inlet pressure (bar)	Air consumption (l/min)	Evacuation time (s/l) at different levels of vacuum (-kPa)									Degree of Vacuum max. (-kPa)
		10	20	30	40	50	60	70	80	90	
3.4	116	0.022	0.06	0.11	0.21	0.4	0.65	0.95	1.60	4	92
6	185	0.018	0.05	0.08	0.18	0.25	0.40	0.62	1.55	/	89

Technical characteristics

Fluid	Unlubricated filtered air
Inlet pressure (bar)	3,4 ... 6
Noise (dBA)	93
Temperature (°C)	-20 ... +80
Material	PPS, SS, PA, NBR
Weight (gr)	675

Accessories

19S34.R	Reduced silencer G3/4"
19S34.S	Silencer G3/4"