


Multifunction vacuum generator

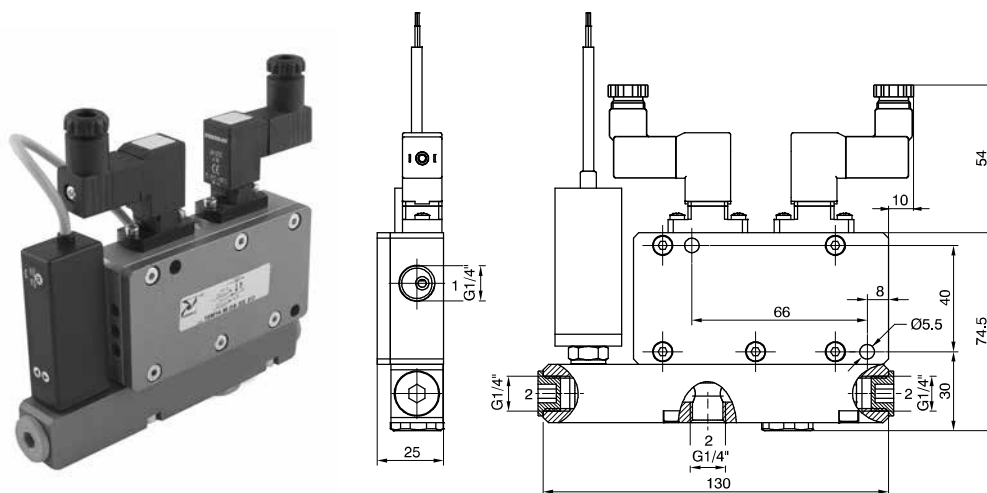


Ordering code

19M14.M.12.SE.⊙

OPTIONS






ED =	Solenoid valves + vacuum switch cable 2 Mt.
EF =	Solenoid valves + vacuum switch cable 30 cm and connector M8
01 =	Solenoid valve without vacuum switch
02 =	Vacuum switch without back pressure valve
04 =	Without vacuum switch and back pressure valve
05 =	Vacuum switch cable 30 cm and connector M8 without back pressure valve



Operational characteristics

- Inlet pressure (bar)	2	4	6
- Degree of Vacuum (-kPa)	40	88	86
- Intake flow rate (l/min)	57	95	112
- Air consumption (l/min)	44	75	109

Performance Charts



Technical characteristics

Fluid	Unlubricated filtered air
Pressure (bar)	0 ... 6
Inlet and release solenoid valve function	N.C.
Power consumption	4 Watt
Supply voltage	24 VDC
Solenoid valve - IP Rating	IP65
Vacuum switch output	2 PNP
Vacuum switch - IP Rating	IP40
Temperature (°C)	-10 ... +60
Weight (gr.)	538

VACUUM GENERATORS