

Series T514

General

TECNO-NAMUR are 5/2 and 4/2 valves are solenoid valves pneumatically or electrically actuated. They are used in industrial automation applications or whenever a **NAMUR** mounting plane is available.

Is available in 5/2, 4/2 and all-purposes versions. The final user can switch from one version to another by simply changing interface plate and adding/removing a plug.

TECNO-NAMUR valves are produced using the most up to date technical features, granting flexible design and elevated characteristics over standard products. Superior performance is further enhanced by the use of innovative materials of construction.

Construction characteristics



Body	Technopolymer
Spacer	Technopolymer
Seals	Nitrile rubber
Springs	Stainless Steel
Operators	Technopolymer
Spools	Nickel plated steel
Screws	Zinc coated Steel

Note:

"Although accurately described, the 4/2 valve actually functions as a 3/2 normally closed valve and should be used as such."

“NAMUR” interface dimensions:

according to standard (VDI/VDE 3847 July 2003)

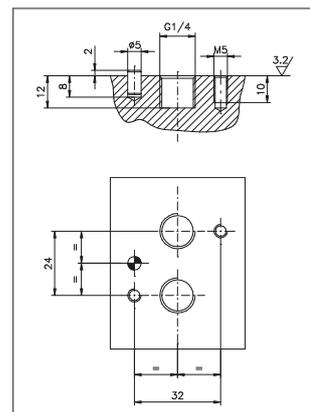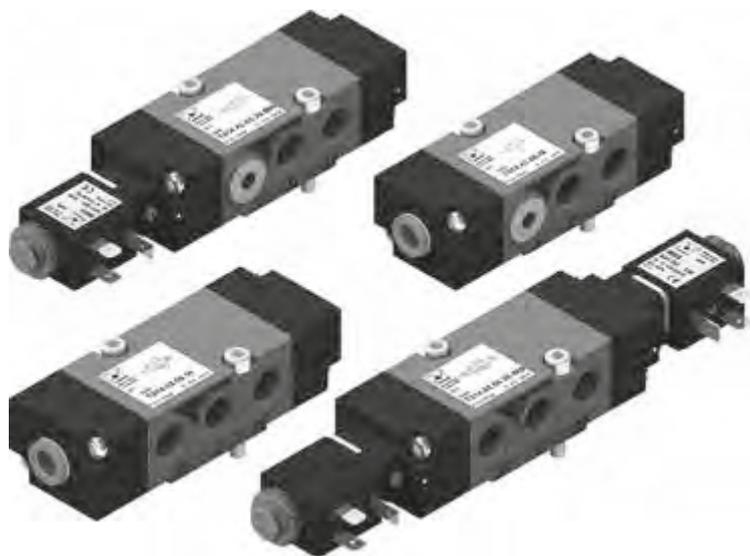

1
AIR DISTRIBUTION

Pneumatic - Differential

Coding: T514.Ⓢ.00.16


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-10 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	1100
Orifice size (mm)	8
Working ports size	G 1/4"

FUNCTION	
Ⓢ	42 = 4 ways
	52 = 5 ways



4 ways

5 ways

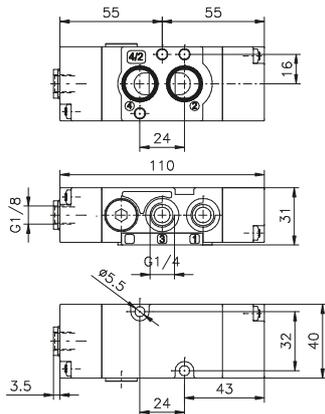

Weight 140 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.42.00.16

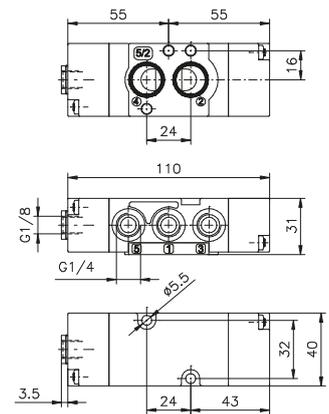

Weight 140 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.52.00.16



Pneumatic - Pneumatic

Coding: T514.Ⓢ.00.18


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-10 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	1100
Orifice size (mm)	8
Working ports size	G 1/4"

FUNCTION	
Ⓢ	42 = 4 ways
	52 = 5 ways



4 ways

5 ways

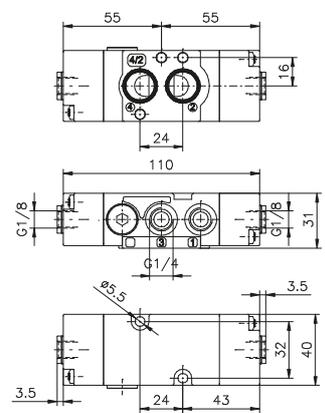


Weight 140 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.42.00.18

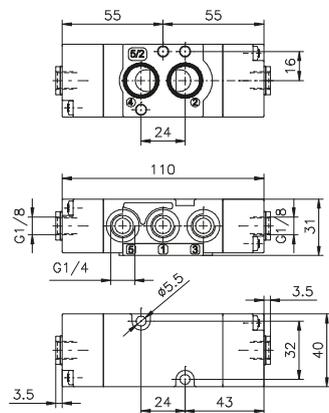

Weight 140 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.52.00.18





1
AIR DISTRIBUTION

Solenoid-Differential

Coding: T514.ⓕ.00.36.Ⓣ

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-10 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	1100
Orifice size (mm)	8
Working ports size	G 1/4"

FUNCTION	
ⓕ 42 = 4 ways	
52 = 5 ways	

VOLTAGE	
Ⓣ B04 = 12VDC	
B05 = 24VDC	
B09 = 24VDC (2W)	
B56 = 24V (50-60 Hz)	
B57 = 110V (50-60 Hz)	
B58 = 230V (50-60 Hz)	



4 ways

5 ways

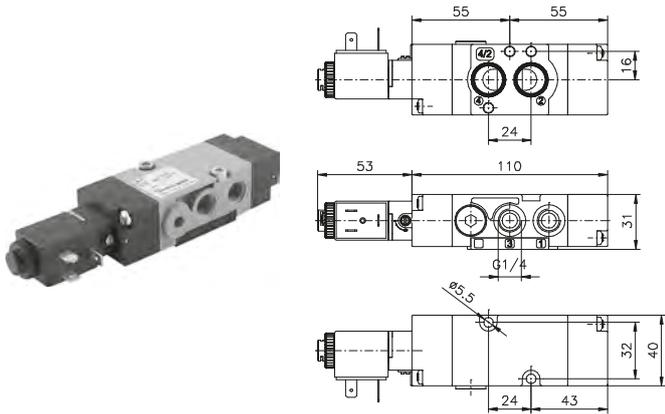


Weight 200 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.42.00.36.Ⓣ

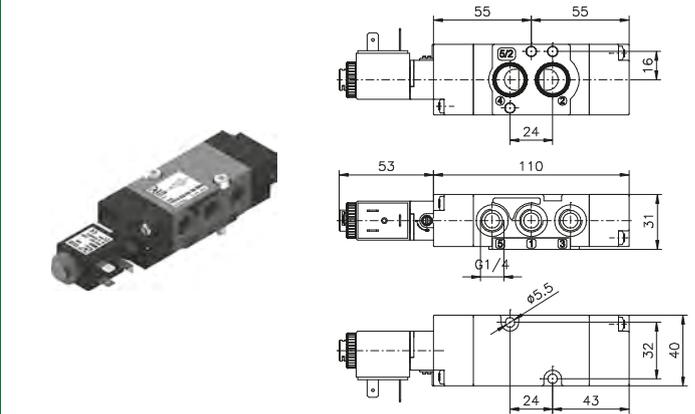

Weight 200 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.52.00.36.Ⓣ



Solenoid - Spring

Coding: T514.ⓕ.00.39.Ⓣ

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-10 ÷ +50
Flow rate at 6 bar with Δp=1 (NI/min)	1100
Orifice size (mm)	8
Working ports size	G 1/4"

FUNCTION	
ⓕ 42 = 4 ways	
52 = 5 ways	

VOLTAGE	
Ⓣ B04 = 12VDC	
B05 = 24VDC	
B09 = 24VDC (2W)	
B56 = 24V (50-60 Hz)	
B57 = 110V (50-60 Hz)	
B58 = 230V (50-60 Hz)	



4 ways

5 ways

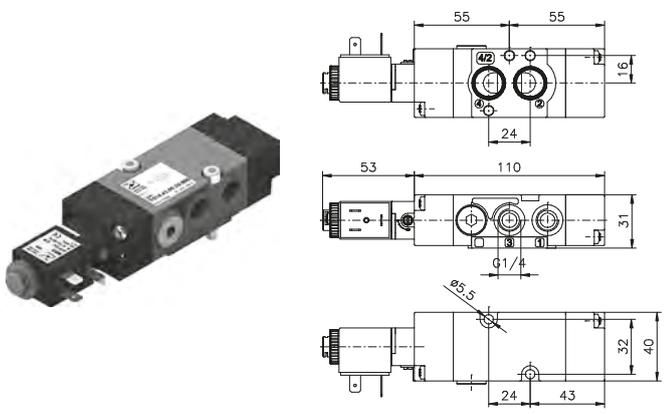

Weight 200 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.42.00.39.Ⓣ

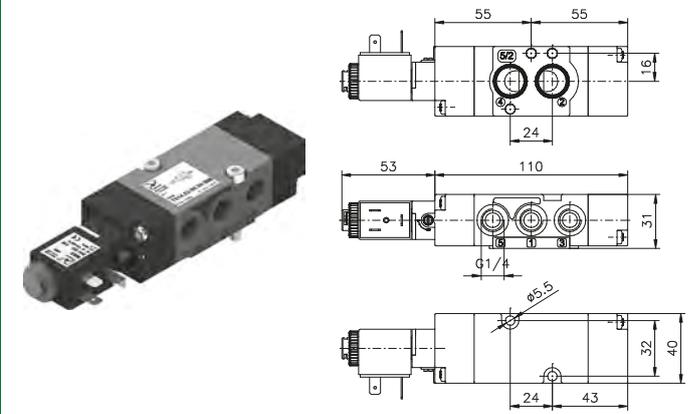

Weight 200 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

T514.52.00.39.Ⓣ





► **Universal kit**


Coding: T514.92.00.V.T

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max working pressure (bar)	10
Temperature °C	-10 ÷ +50
Flow rate at 6 bar with Δp=1 (l/min)	1100
Orifice size (mm)	8
Working ports size	G 1/4"

VERSION		VOLTAGE	
16	= Pneumatic - Differential	B04	= 12 VDC
18	= Pneumatic - Pneumatic	B05	= 24 VDC
19	= Pneumatic - Spring	B09	= 24 VDC (2W)
35	= Solenoid - Solenoid	B56	= 24V (50-60 Hz)
36	= Solenoid - Differential	B57	= 110V (50-60 Hz)
39	= Solenoid - Spring	B58	= 230 V (50-60 Hz)



Weight 170 g
Minimum working pressure 2,5 bar
Maximum fitting torque 9 N/m

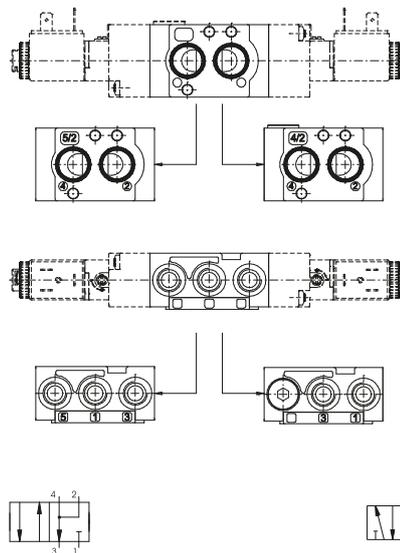

1
AIR DISTRIBUTION