

TECHNICAL DATA SHEET

PMAFLEX - CYFH - Corrugated Conduit

Flexible, heavy-duty

PMA



Flexible conduit ideal for automotive applications



Applications:

• In automobile industry

Features & Benefits:

- Good flexibility
- Good impact strength also at low temperatures and dry conditions
- Self-extinguishing

Materials:

• High-grade, specially formulated polyamide 6

Compatible with:

- PMAFIX Pro, PMAFIX, PMA Smart Line fittings
- PMA accessories

Temperature range:

• -30°C ... +90°C continuous, +125°C short-term

Conforms to:

• NF R 13-903

Weathering resistance:

• Very good UV resistance and weathering characteristics

Colour:

• Black

Chemical properties:

Please refer to www.pma.ch
(Technical Information / Chemical Resistance)


Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

CYFH-Index								
min.								max.
Ductility	l		ļ		I		ı	
Fatigue reversed	bending							
Compression res	istance							
Low temperature	perform	ance						
Weathering resis	tance							

Product selection:										
Part no.	Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)			Weight	Packing unit
black	T/G	NW	metric	PG	metric	d1	d2	stat. R	kg/100 m	metre
CYFHG-23B	G	23	25	21	M25x1.5	21.4	28.4	50	12.5	50
CYFHG-29B	G	29	32	29	M35x1.5	27.2	34.5	60	17.0	50
CYFHG-36B	G	36	40	36	M40x1.5	35.8	42.4	70	21.0	30
CYFHG-48B	G	48	50	48	M50x1.5	46.8	54.5	80	28.0	30

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

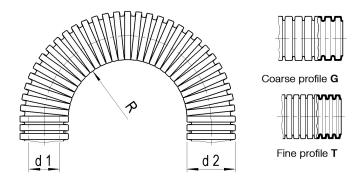

stat R. = Lowest recommended bending radius for static (fixed) installation

Mechanical Properties:	Value:	Test parameters:	Test method:
Impact strength	> 12 J	(+23°C)	PMA DO 9.21-4330
Compression strength	> 300 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 600 N	(100 x 100 mm)	PMA DO 9.21-4320
Reverse bending resistance	> 15'000 cycles		PMA DO 9.21-4420
	> 40'000 cycles		PMA DO 9.21-4425
Pull-out resistance conduit - fitting ser	ies		
PMAFIX IP68	> 500 N		PMA DO 9.21-4610
PMAFIX IP66	> 400 N		PMA DO 9.21-4610

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated.

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	−30 +90°C		PMA DO 9.21-4510
Upper application temperature	+110°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+125°C	(168 h)	PMA DO 9.21-4360

