




**Product selection:**

Part no.		Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)				Weight	Packing unit
black	grey	T/G	NW	metric	PG	metric	d1	d2	stat. R	dyn. R.	kg/100 m	metre
PIST-07B	PIST-07S	T	7	10	7	M12x1.5	6.7	10.0	15	40	2.2	50
PIST-10B	PIST-10S	T	10	12	9	M12x1.5	9.7	12.8	20	50	2.8	50
PIST-12B	PIST-12S	T	12	16	11	M16x1.5	12.0	15.6	25	65	3.8	50
PIST-17B	PIST-17S	T	17	20	16	M20x1.5	16.7	21.1	30	85	5.7	50
PIST-23B	PIST-23S	T	23	25	21	M25x1.5	23.2	28.4	40	110	9.9	50
PIST-29B	PIST-29S	T	29	32	29	M32x1.5	28.9	34.5	50	135	13.3	50
PIST-36B	PIST-36S	T	36	40	36	M40x1.5	36.8	42.4	60	170	16.0	30
PIST-48B	PIST-48S	T	48	50	48	M50x1.5	48.0	54.5	75	220	22.8	30
PISG-17B	PISG-17S	G	17	20	16	M20x1.5	15.8	21.1	35	85	6.3	50
PISG-23B	PISG-23S	G	23	25	21	M25x1.5	22.0	28.4	45	110	9.9	50
PISG-29B	PISG-29S	G	29	32	29	M32x1.5	27.8	34.5	55	135	13.3	50
PISG-36B	PISG-36S	G	36	40	36	M40x1.5	36.2	42.4	65	170	16.0	30
PISG-48B	PISG-48S	G	48	50	48	M50x1.5	47.1	54.5	85	220	22.8	30
PIHG-56B	PIHG-56S	G	56	68	-	-	57.0	67.5	110	270	33.0	30
PIHG-70B	PIHG-70S	G	70	80	-	-	68.0	79.6	130	320	46.0	30
PIHG-95B	PIHG-95S	G	95	106	-	-	92.5	107.0	170	430	68.0	30
PIHG-125B	PIHG-125S	G	125	146	-	-	126.9	146.0	230	580	93.0	20

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time  
 Conduit size NW10 - NW125 UL recognized to UL 1696 (UL file E 80294)

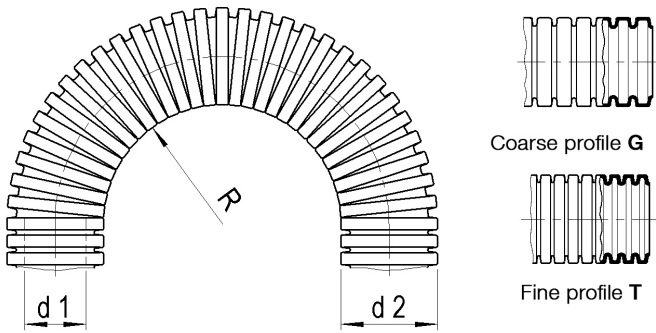

stat. R. = min. bending radius for static (fixed) installation

dyn. R. = min. bending radius for dynamic (flexible) installation

<b>Mechanical Properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Impact strength	> 5 J	(+23°C)	PMA DO 9.21-4330
	> 12.2 J	(-18°C)	UL 1696/CSA 22.2 Nr. 227.3
	class 2, > 1 J	(-45°C)	IEC EN 61386
	class 3, > 2 J	(-15°C)	IEC EN 61386
	class 4, > 6 J	(+23°C)	IEC EN 61386
Compression strength	> 175 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 350 N	(100 x 100 mm)	PMA DO 9.21-4320
	class 2		IEC EN 61386
Resistance to fatigue	> 4'000'000 cycles		PMA DO 9.21-4420
	> 10'000'000 cycles		PMA DO 9.21-4425
	> 5'000 cycles		IEC EN 61386-23
<b>Pull-out resistance conduit - fitting series</b>			
PMAFIX Pro	> 350 N		PMA DO 9.21-4610
PMAFIX IP68	> 300 N		PMA DO 9.21-4610
PMAFIX IP66	> 250 N		PMA DO 9.21-4610
PMAFIX Pro, PMAFIX IP66 & IP68	class 1		IEC EN 61392

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated

<b>Thermal properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Continuous application temperature	-50 ... +95		PMA DO 9.21-4510
Upper application temperature	+110°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+150°C	(168 h)	PMA DO 9.21-4360
Application temperature range	-45 ... +105°C		IEC EN 61386
Application temperature range	-18 ... +90°C		UL 1696/CSA 22.2 Nr. 227.3

<b>Fire safety properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Fire performance	non flame-propagating		IEC EN 61386
Fire performance	V0		UL 94

ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

